


**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 : <b>B08B 9/04</b>	<b>A1</b>	(11) International Publication Number: <b>WO 00/30773</b> (43) International Publication Date: <b>2 June 2000 (02.06.00)</b>
<p>(21) International Application Number: <b>PCT/GB99/03907</b></p> <p>(22) International Filing Date: <b>24 November 1999 (24.11.99)</b></p> <p>(30) Priority Data: <b>9825714.0</b> <b>24 November 1998 (24.11.98)</b> <b>GB</b></p> <p>(71) Applicant (for all designated States except US): <b>HAMDEEN LIMITED (GB/GB); Birkdale House, 7 Myrtle Street, Douglas, Isle of Man IM1 4ED (GB).</b></p> <p>(72) Inventor; and (75) Inventor/Applicant (for US only): <b>LAKER, Keith (GB/-); 1 Piersteps, St Peter Port, Guernsey GY1 2LF (GB).</b></p> <p>(74) Agent: <b>KENNEDY &amp; CO.; Queens House, 4th floor, 29 St Vincent Place, Glasgow G1 2DT (GB).</b></p>	<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b> <i>With international search report.</i></p>	

(54) Title: PIPELINE PIG

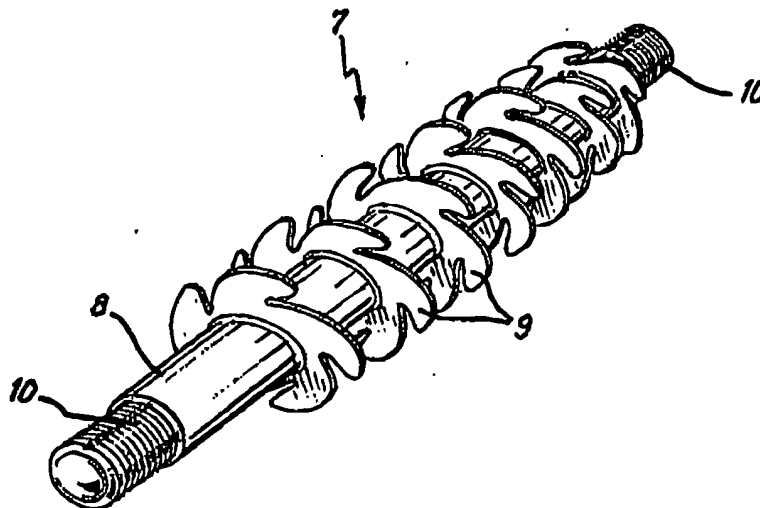

(57) Abstract

A pig (1) for use with a tubular bore wherein the pig (1) is comprised of a body (2) which supports a plurality of turbine blades (3) wherein the blades (3) mechanically break down and remove debris from the tubular bore. The blades (3) have a profile which allows forward movement and rotation about a longitudinal axis when acted upon by a propulsion fluid travelling through the tubular. In an alternative embodiment the blades are mounted on a stabiliser body to allow simultaneous centralisation and cleaning.